


# CANOPY CORPORATION ROLL-FORMED ALUMINUM CANOPY SYSTEM

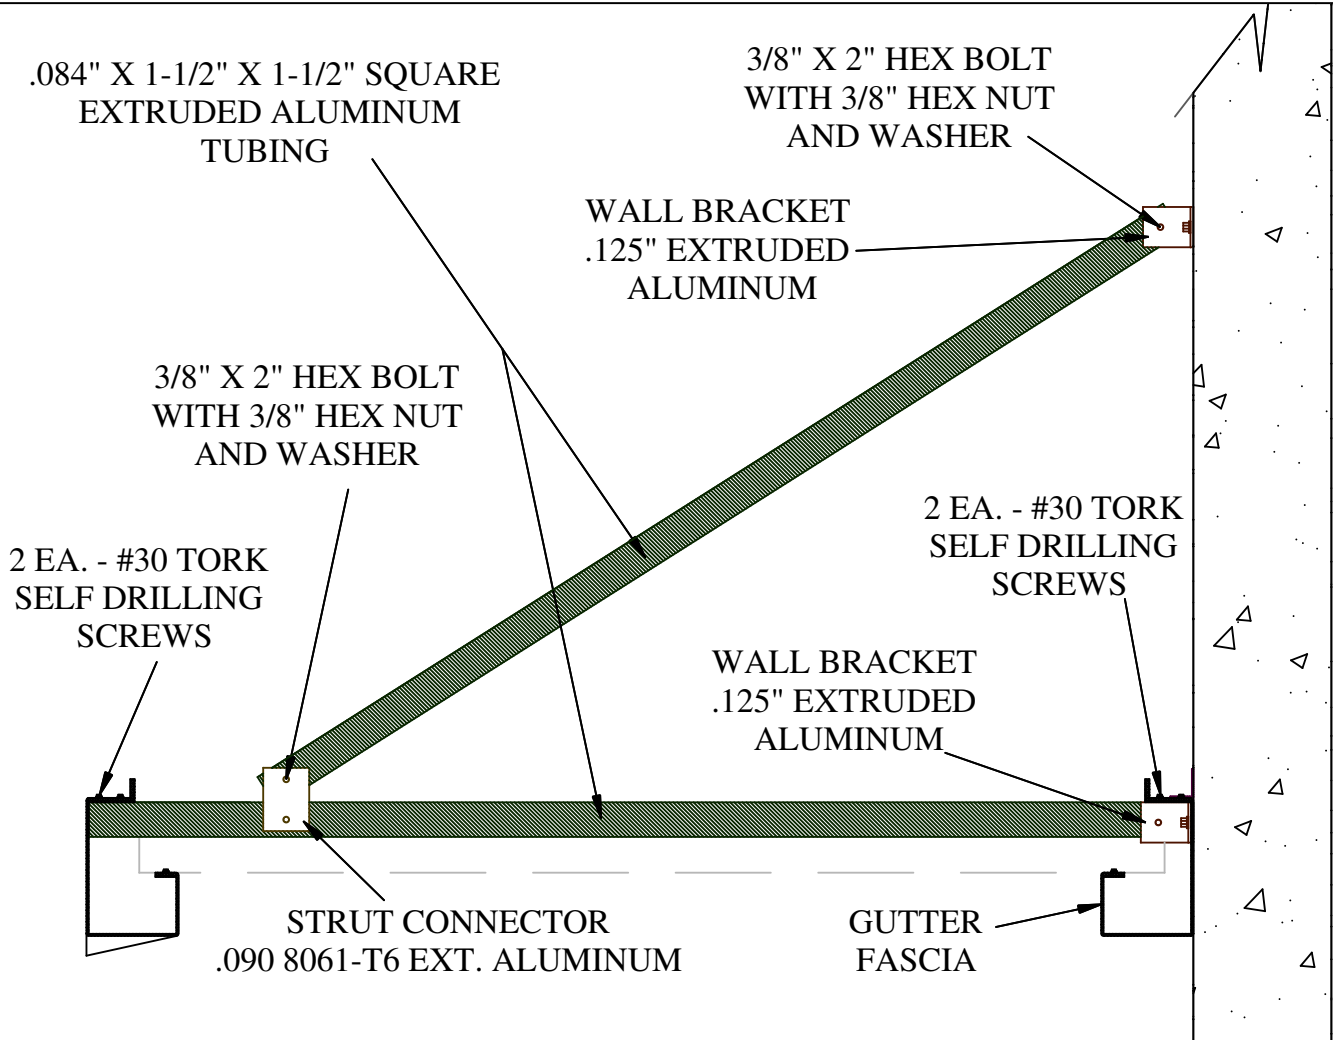

THE WALL BRACKET, STRUT CONNECTOR AND TUBING WILL BE OF 6-61-T6 EXTRUDED ALUMINUM.

OVERHEAD SUPPORT SPACING			
PROJECTION	LIVE LOAD		
	20 PSF	30 PSF	40 PSF
4' - 0"	14'-11"	7'-7"	5'-9"
5' - 0"	9'-3"	6'-2"	4'-8"
6' - 0"	6'-10"	4'-7"	3'-5"

ATTACHEMENT TO THE WALL OF THE FASCIA, GUTTER AND WALL BRACKET WILL BE DETERMINED BY LOCAL BUILDING OFFICIALS, CONSULTING ENGINEERS, ETC. DEPENDING UPON THE WALL MATERIAL AND STRUCTURAL INTEGRITY OF THE WALL. CANOPY CORPORATION CANNOT ACCEPT THE RESPONSIBILITY FOR THE SELECTION OF WALL FASTENERS OR FAILURES RESULTING FROM IMPROPER SELECTION AND/OR INSTALLATION.

THE OVERHEAD SUPPORT KIT CONSISTS OF:

1 EACH - MILL FINISH STRUT CONNECTOR, 1 EACH - MILL FINISH WALL BRACKET, 2 EACH - 3/8" X 2" HEX BOLTS, 2 EACH - 3/8" PLATED HEX NUTS, 2 EACH - PLATED WASHERS, 10 EACH - #30 TORK SELF DRILLING SCREWS.



P.O. Box 21207  
 Winston-Salem, NC 27120  
 Ph: 336-837-0077  
 Email: sales@canopy-corp.com  
 Website: www.canopy-corp.com